

STANLEY®

SIMPLE START™

QUICK START GUIDE

⚠ WARNING


Read all your vehicle and the lithium-ion battery booster instructions before operating the unit. Failure to follow instructions may result in electric shock, fire and/or serious injury.



ICONS + COLORS

The SIMPLE START™ Li-Ion Battery Booster is equipped with an LED indicator ring that changes color depending on unit's function or condition.

This guide indicates what the icons and colors mean:

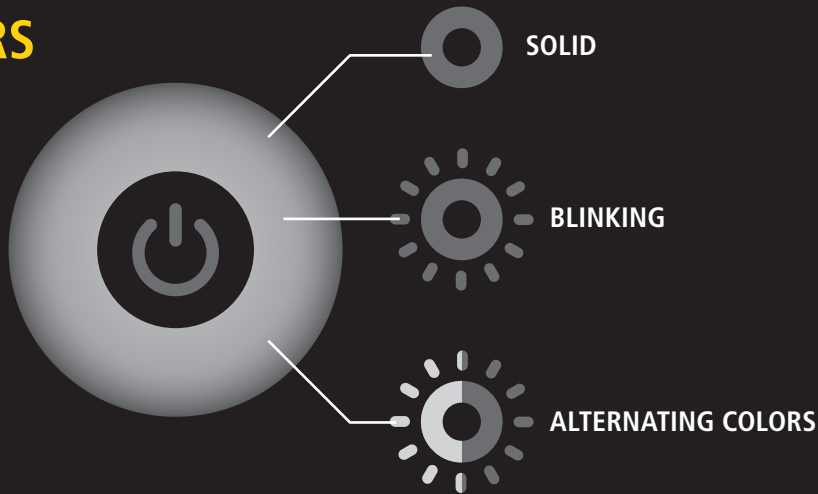

**UNIT
BATTERY
STATUS**




Low



Medium



Full



Charging

**VEHICLE
BOOSTING
STATUS**



Boost
Stage 1



Boost
Stage 2



Boost
Stage 2



Ready
to Start
Vehicle

**FAULT
CONDITIONS**



Unit Overheat or
Reverse Clamps



Vehicle
Battery
Fault



Low Battery
Voltage
Recharge Unit

HOW TO BOOST A VEHICLE

1. Connect to the vehicle (two ways to connect):



A. Connect the unit to the vehicle's DC accessory outlet.

OR



B. Connect the unit directly to the vehicle battery with the included battery clamps.



2. Press the main power button to turn the unit ON. The SIMPLE START™ will automatically detect the vehicle's depleted battery and will begin the process to boost.*
3. When the LED changes to solid green the vehicle is ready to start.

Power ON



Stage 1



Detecting
Analyzing
Initial Boost

Stage 2



Boosting

Stage 3



Final Boost

Go!



Ready
to Start
Vehicle

**Note: Some vehicles may require you to turn the ignition key to the ACC (accessory) position to activate the DC accessory outlet.*

AREA LIGHT

1. Press the Main Power Button to turn the unit ON.
2. Press the USB/ Light Button to turn on the LED area light.
3. To turn the light OFF, press the USB/ Light Button again.



2 AMP USB PORT




1. Press the Main Power Button to turn the unit ON.
2. Press and hold the USB/ Light Button for 2 seconds and release to turn on the USB Charging Port. The ring around the port will turn blue.
3. Plug in your USB Device to power or recharge.
4. To turn off the USB charging port, press and hold the USB/ Light Button for 2 seconds and release.



Note: After 1 Minute of inactivity the SIMPLE START™ will shut down to protect the internal battery.

HOW TO CHECK THE UNIT BATTERY STATUS

Press the Main Power Button. The LED Indicator ring will light up Blue, Yellow or Red to indicate the unit's Battery Status.

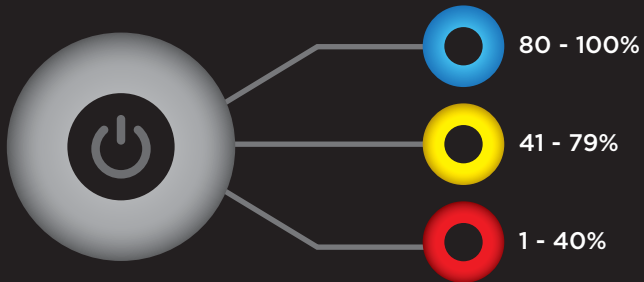

HOW TO CHARGE THE UNIT AT HOME

1. Connect the AC adapter to the single pin connector port on the side of the unit and plug into a wall outlet.
2. The LED Indicator ring will flash blue while charging and light solid blue when fully charged.



Charging



Fully Charged

HOW TO CHARGE THE UNIT IN YOUR CAR



1. Connect the DC charging cable to the Unit's dual Pin Connector and plug it into the vehicle's accessory outlet.
2. Press the Main Power button to turn the unit ON.*
3. Depending on vehicle voltage the unit may start to flash blue indicating it is recharging.
4. The LED Indicator ring will flash blue when charging and light solid blue when fully charged



If the LED indicator flashes red, yellow or green, then press the USB/Light button for 5 seconds and release to force the unit into charging mode.



Charging




Fully Charged

**Note: Some vehicles may require you to turn the ignition key to the ACC (accessory) position to activate the DC accessory outlet.*

FAULT INDICATORS

Multi-colored flashes indicate the unit is not able to perform. The Indicator ring will cycle between two colors:



RED :: BLUE

The unit is overheating or the clamps are installed in reverse.



RED :: GREEN

The unit has detected a problem with the vehicle's battery.



RED :: YELLOW

The unit's internal battery is extremely low and needs to be recharged immediately or the unit will automatically shut down.

STANLEY®

www.stanley12volt.com/simplestart